

**American Lift Systems, Inc.**

**DBA:**

# **AMERICAN** *Custom Lifts*

## **Q10: 10,000 LB Capacity ALI/ETL Certified 2-Post Lift**



**model#: Q10**

**Asymmetric Application**

**model#: Q10**

Asymmetric/Symmetric Lift  
10,000 lb. lifting capacity

**Asymmetric/Symmetric  
Lifting**



**model#: Q10**

**Symmetric Application**

**model#: Q10**

Asymmetric/Symmetric Lift  
10,000 lb. lifting capacity

**American Lift Systems, Inc.**

**DBA:**

# **AMERICAN** *Custom Lifts*

# AMERICAN Custom Lifts

## Model: Q10

- Single piece overhead for ease of installation
- Padded overhead bar for improved vehicle protection
- Faster rise for improved productivity
- Thicker cables and steel pulleys for longer life
- Taller carriage for reduced slider wear
- 71" cylinder stroke for excellent rise
- Adjustable height

Specifications	Model: Q10
Lifting Capacity	10,000 lb. (4535kg)
Rise Height	78 <sup>3</sup> / <sub>4</sub> " (2000mm)
Adj. Height Overall	12' 3 <sup>1</sup> / <sub>2</sub> " or 11' 5 <sup>1</sup> / <sub>2</sub> " (3747mm or 3493mm)
Width Overall	131 <sup>3</sup> / <sub>4</sub> " (3347mm)
Drive-Thru Clearance	98 <sup>3</sup> / <sub>8</sub> " (2499mm)
Floor To Overhead Switch	11' 8 <sup>1</sup> / <sub>2</sub> " or 10' 10 <sup>1</sup> / <sub>2</sub> " (3568mm or 3314mm)
Front Arm Reach	Min. 21 <sup>3</sup> / <sub>4</sub> " / Max. 39 <sup>1</sup> / <sub>4</sub> " (Min. 553mm / Max. 998mm)
Rear Arm Reach	Min. 38 <sup>1</sup> / <sub>4</sub> " / Max. 55 <sup>3</sup> / <sub>8</sub> " (Min. 971mm / Max. 1407mm)
Screw Pad Height	Min. 4" / Max. 7 <sup>1</sup> / <sub>2</sub> " (Min. 103mm / Max. 193mm)
Inside Columns	9' 2 <sup>1</sup> / <sub>4</sub> " (2800mm)
Motor	2HP , 60Hz
Voltage Single Phase	208v-230v
Ceiling Height Required	12' 5" (3785mm)
Max. Load Per Arm	2,500 lb. (1134mm)

\* Rise height is measured with screw pads in highest position.

\*\* Specifications are listed without rubber pad, for measurements with rubber pad add 1/4" (6mm)



## OPTIONAL ACCESSORIES:

10315:

(4) 3" Stack Extensions, (2) 6" Stack Extensions and (2) Organizer Racks with hardware.



10313:

(2) 6" Stack Adapters Extensions




10314

(2) U-Shaped Frame Truck Adapters



10318:

(4) U-Shaped Frame Truck Adapters

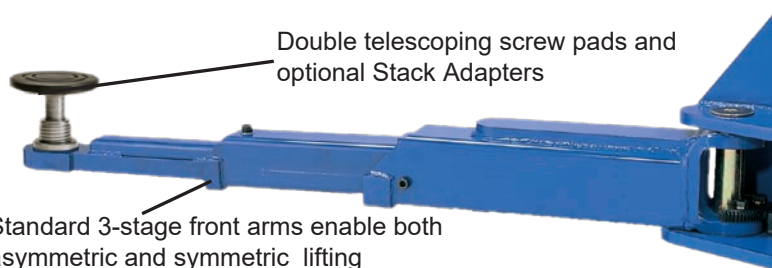

Double telescoping screw pads and optional Stack Adapters

Standard 3-stage front arms enable both asymmetric and symmetric lifting capabilities