

CLFP9





CL Challenger Lifts

SITE SPECIFICATIONS

- **BAY HEIGHT:** 10' 2" minimum
- **BAY WIDTH:** 12' recommended
- **BAY DEPTH:** 24' recommended
- **POWER REQ.:** 208-230v Single Phase*, 30-amp breaker
- **MIN. CONCRETE SPEC:** 4" thick, reinforced, free from cracks/seams, rated at 3500+ psi, cured at least 28 days

SERVICE BAY LAYOUT

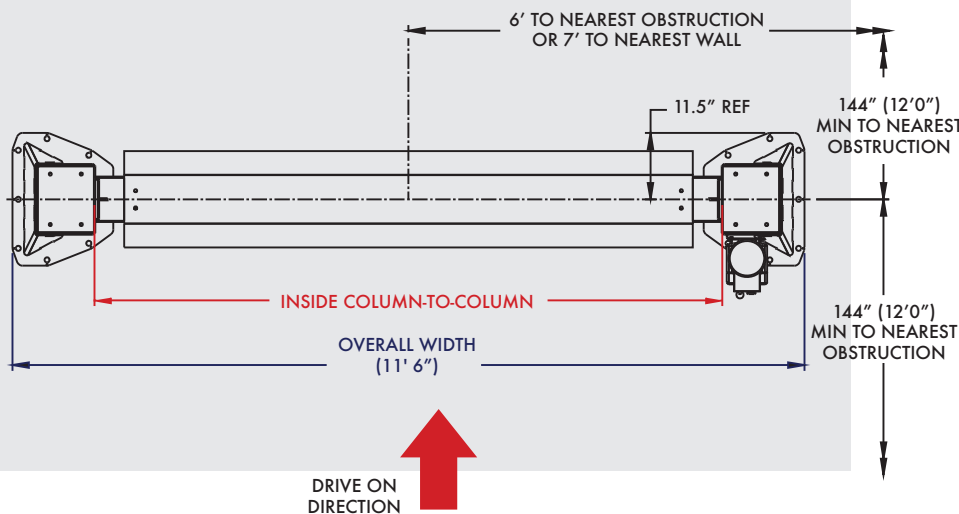

Model Number	CLFP9
Lifting Capacity	9,000 lbs.
Lifting Configuration	Symmetric
Arms	3-stage front/3-stage rear
Overall Height	120.875"
Rise Height	78.125"
Screw Pad Height	4" / 5.875"
Overall Width	137.5"
Inside Columns	109"
Drive-Thru Clearance	98.187"
Floor to Overhead Switch	-
Front Arm Reach	24.5" / 44.5"
Rear Arm Reach	24.5" / 44.5"
Motor / Voltage	2HP, 208v-230v, 60Hz, 1Ph
Speed of Rise	50 s
Ceiling Height Required	10' 2"
ALI/ETL Certified	-
2' Height Extension Available	-
3' Height Extension Available	-
Colors Available	

*3-phase upgrade is available for purchase

888-711-5438 | 619-286-543 | www.aclifts.com | Fax: 619-330-2111
 Email: sales@aclifts.com 720 N. Norma Street Suite D | Ridgecrest, CA 93555