



'MaximumOne' Single Post Parking Lift





ALUMINUM DRIVE ON RAMPS: Included

SPACE-SAVING SINGLE POST DESIGN:

Requires less garage space than two-post and four-post parking/storage lifts. Offers unrestricted access. No worries about multiple posts to scratch your car or ding your wing mirrors during entry/exit

SUPERIOR LIFTING HEIGHT

With up to 82" of clearance on its top lock, the MaximumOne accommodates virtually any car, truck, van and SUV on the market!

STURDY LIFTING CAPACITY:

Easily lifts most cars, trucks, vans and SUV's.

POWER UNIT:

220v. 110v optional for 4.5 only (Derated to 4K capacity)

POSITIVE LOCKING MECHANISM:

Precision-engineered mechanism automatically engages locks for maximum safety when lift is raised.

NON-SAG STEEL TRACKS WITH SAFETY WHEEL GUIDES:

Gives you easy access for oil changes and underbody work.

ADJUSTABLE TRACK WIDTH:

You can increase or decrease the width between tracks to fit virtually any size vehicle you want!


INSTALLATION:

Mounts on standard concrete foundation using anchor bolts. Install yourself or use our nationwide professional installation service.

MaximumOne Single Post Lift M1-4.5 and M1-6.5

M1-4.5 4500 lb. CAPACITY M1-6.5 6500 lb. CAPACITY



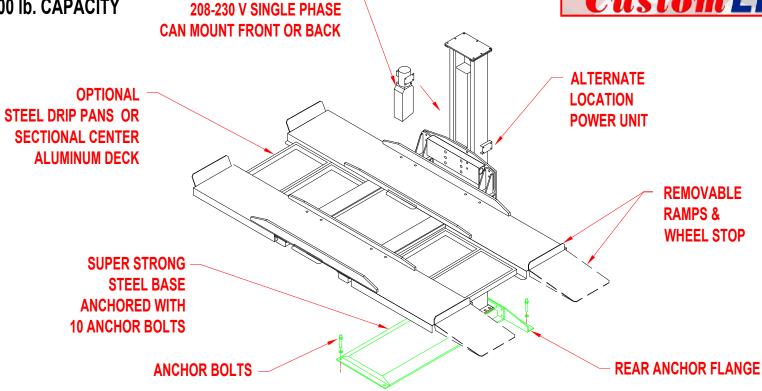

POWER UNIT

MaximumOne Features

Superior Display Capabilities For Your Showroom, Museum, or Gallery

Out-of-the-way single post, open tracks for easy underbody viewing.

Positive Locking Mechanism \ Multiple Locking Positions: Precision-engineered mechanism automatically engages locks for maximum safety when lift is raised. Locks positions at several different heights enable you to choose the display height you want.


Adjustable Track Width: Easily lifts most cars, mini vans and meduim SUV's. Easily lifts most cars, mini vans and meduim SUV's.


Easy Installation: You can change the width between tracks to fit virtually any size vehicle you want.

Custom Lifts Available: Extended Height Available, Single-Point Electric Lock Release or 3 Button that allows safe and convenient push-button operation of your lift from nearby location.

Call Us Monday - Friday
7:30 AM - 4:30 PM
Toll Free 1.888.711.5438 (USA Only)
USA 619.286.5438 (Worldwide)
or email sales@aclifts.com


MaximumOne Single Post Lift Specifications

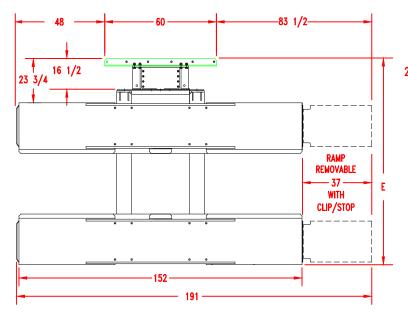




CONCRETE: 3000 PSI, 4" THICK REINFORCED W/ STEEL BAR, MESH


TOP VIEW

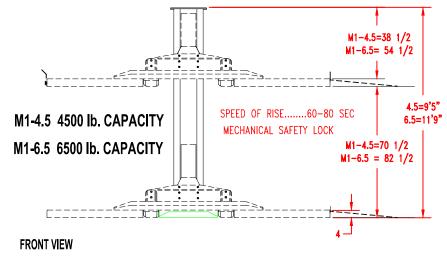

6.14.17 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE OR LIABILITY




SOLID CENTER COMPARISON



Standard: 86" arms 32" Solid Center Deck A = Inside 79" Outside 82"

В	35"
С	22"
D	25"
Е	107"

Over all width is 106" - nominal
Tolerance formed and weldments is plus or minus 1/4
STACK-UP could be 107



Optional: 91" arms 37" Solid Center Deck
A = Inside 84" Outside 87"

В	40"
С	22"
D	25"
Ε	112"

Over all width is 110-1/2" - nominal
Tolerance formed and weldments is plus or minus 1/4
STACK-UP could be 112